



# Disassembling LG420G Entire phone

Documentation of disassembly of the entire phone.

Written By: Anthony Aquino



## INTRODUCTION

Documentation of disassembly of the entire phone.

---



### TOOLS:

- [Tweezers](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)
- [Plastic Cards](#) (1)

*Optional*

---

## Step 1 — Entire phone



- Start with gathering tools needed

## Step 2



- Start with the back of the phone (the battery and cover has already been taken out.)



## Step 3



- Place finger to take out the sim card. Then take out sim card.

## Step 4



- Locate Screws

## Step 5



- Unscrew the six screws.

## Step 6



- With tweezers, pry around the sides to expose the circuitry.



## Step 7




- Remove the back part of the phone to expose the layers inside.

## Step 8



- Remove small parts from the sides.

## Step 9

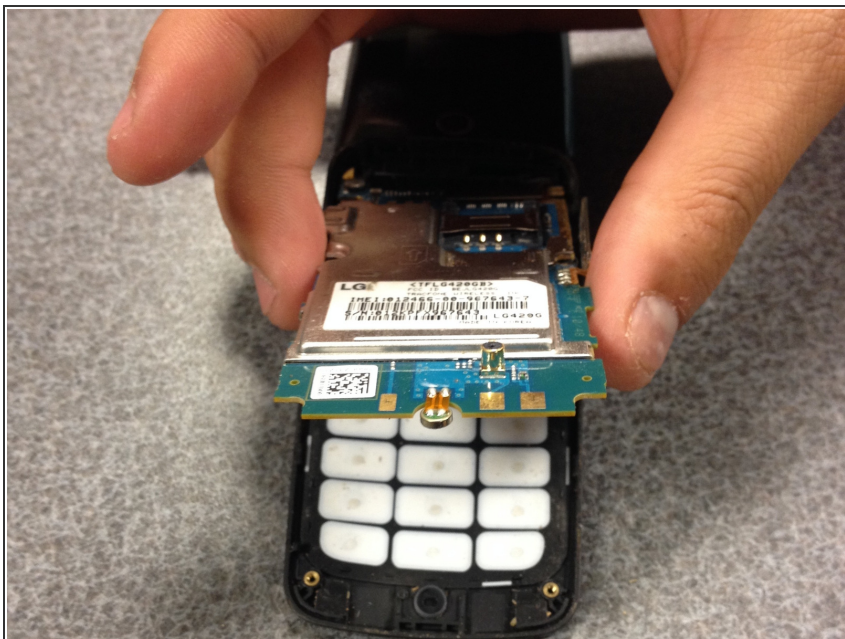

- Remove the layer connected with the keypad.

## Step 10



- Release the keypad from the phone frame.




## Step 11



- With a prying tool, start opening the front face of the phone.

## Step 12

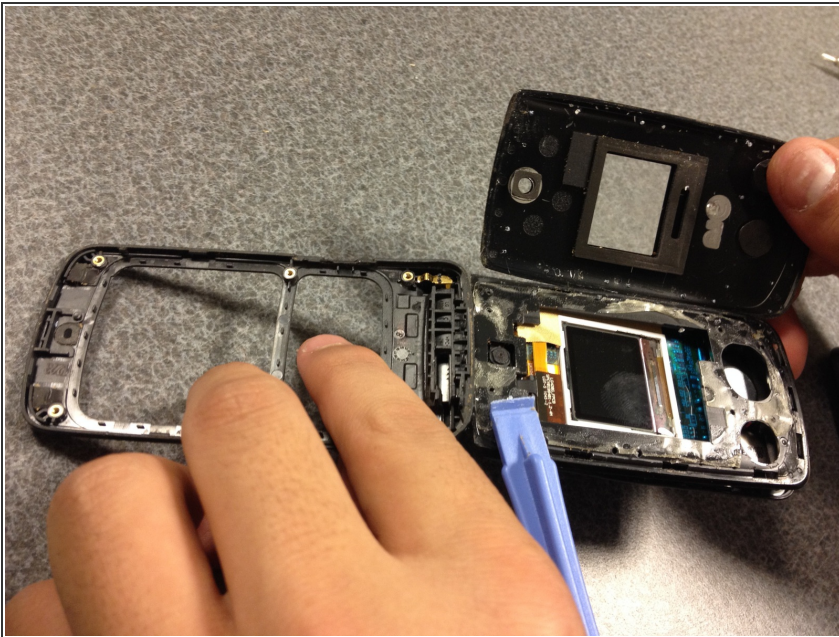

- Remove the front cover, exposing the layers inside.



## Step 13



- Pry open the glued layer.

## Step 14



- Remove all loose part, and should result in the components shown in the picture.

To reassemble your device, follow these instructions in reverse order.